OMRON

Light Convergent Reflective Sensor **B5W-LB**



Reliable Detection of Shiny, Black or Transparent Objects

Light Convergent Reflective Sensor

Robustness of the distance / Robustness of color / Line up



Reliable Detection of Shiny, Black or Transparent Objects


Light Convergent Reflective sensor for embedding in 24 VDC equipment

A series of types with indicator lamps showing the sensor's operating statuses have also been added





Applications

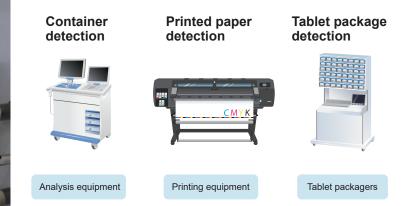

Robustness of color

Stable detection of shiny, black or transparent objects



Robustness of the distance

A wide sensing range to allow object shifting

Line up

Suitable for embedding in commercial equipment

Cup detection







Delivery boxes

Article detection



Sanitation equipment

Hand detection



Robustness of color

Stable detection for of shiny, black or transparent objects


Past problem Sensing of shiny, black or transparent objects was unstable, requiring more man-hours for development and production processes.




Here's why

Light Convergent Reflective Sensor Principles

The presence of an object is detected by the received light reflected off a sensed object. The sensor's optical system has a limited projection beam and light sensing area, so the system is capable of sensing objects only within a specific distance from the sensor (the range in which the projection beam and the light sensing area overlap).

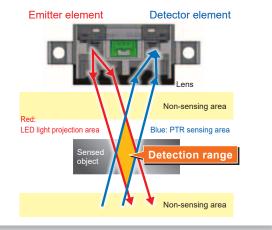


Unaffected by backgrounds, meaning only the intended object is sensed accurately.

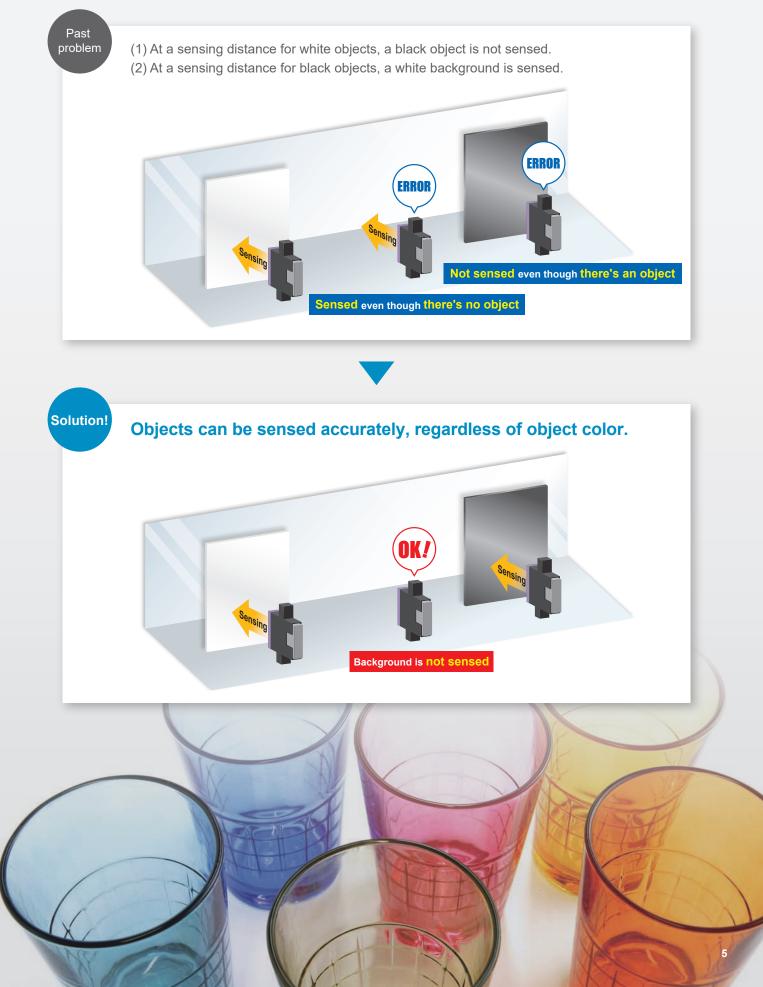

Robustness of the distance

A wide sensing range to allow object shifting

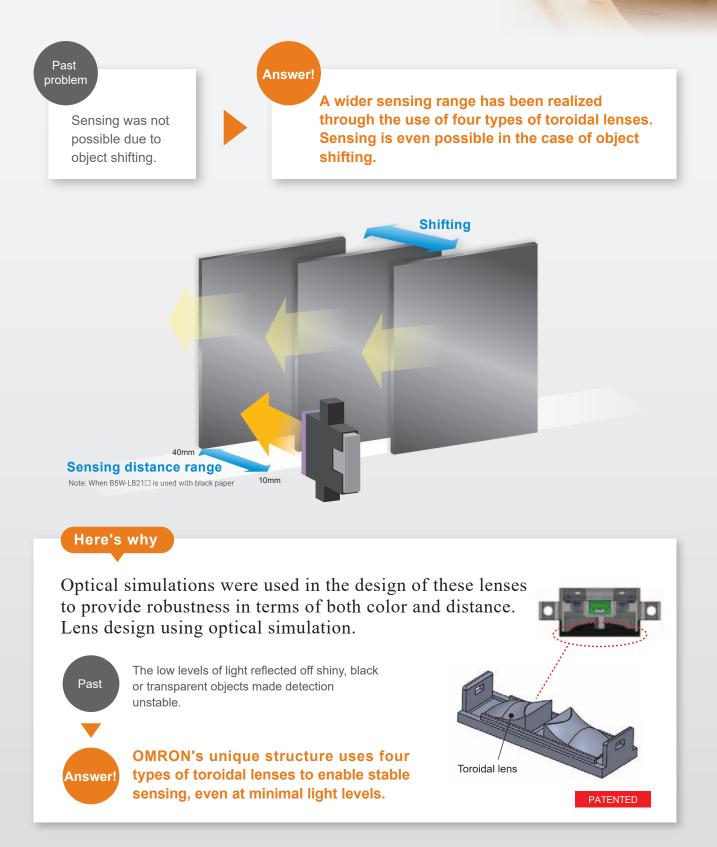

Line up

Suitable for embedding in commercial equipment

Output type	Analog output type	Digital output type			
	Miniature type			Super miniature type	
Exterior		0 0			
Power supply voltage	5 VDC ±10%	24 VDC ±10%			
Output type	Analog (phototransistor output)	ON/OFF (NPN open collector output)			
Operation indicator lamp	Not available	lable Available (orange)		Not available	Available (orange)
Degree of protection	-	IP50 (IEC60529 standard, category 2)(not including terminals)			
Sensing distance (Target object: white paper)	10 to 55 mm Note: When using a predetermined threshold value			2 to 10 mm	
Model	B5W-LB2101-1	B5W-LB2112-1 B5W-LB2122-1	B5W-LB2114-1	B5W-LB1112-1 B5W-LB1122-1	B5W-LB1114-1

24 VDC				
Connects easily				
Environmental resistance				


We also have a lineup of noise-resistant 24V models ideal for commercial equipment and models with indicator lamp.

An ON/OFF output that enables direct connections to control equipment such as PLCs.

IP50 for use in a wide range of applications, including heavy dust. $\ensuremath{\mathsf{Note:Only\ digital\ output\ type}}$

Performance comparison with conventional sensors

Capable of sensing workpieces of various colors over a wide sensing range

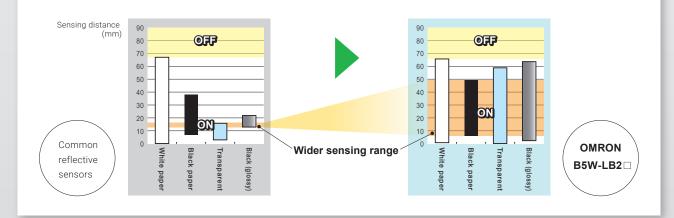

Please check each region's Terms & Conditions by region website.

OMRON Corporation Device & Module Solutions Company

Regional Contact

Americas https://components.omron.com/us Asia-Pacific https://components.omron.com/ap Korea https://components.omron.com/kr

Europe https://components.omron.com/eu China https://components.omron.com.cn Japan https://components.omron.com/jp

© OMRON Corporation 2019-2024 All Rights Reserved. In the interest of product improvement, specifications are subject to change without notice.